SEGWAY

SEGWAY AT5
ACCESSORIES INSTALLATION MANUAL




segwaypowersports.com

V2.0

HEATED SEAT CUSHION (AT5 L / AT5 S)

HEATED SEAT CUSHION ASSEMBLY DIAGRAM

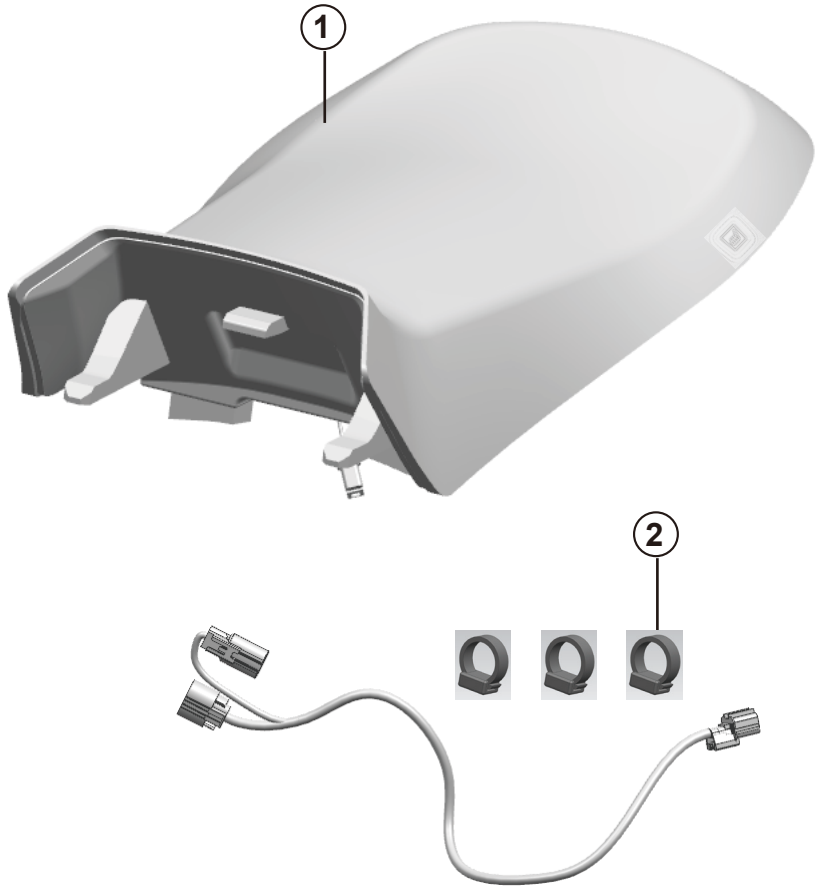


ITEM	PART NAME	PART NUMBER	QTY	REMARKS
1	Heated Short Seat Cushion Assembly	A10-K111000-000-00	1	Applicable to AT5 S
	Heated Long Seat Cushion Assembly	A11-K111000-000-00		Applicable to AT5 L
2	Cable Tie		3	

TIPS


This installation guide applies to multiple models. Illustrations may vary slightly from the actual vehicle. Always refer to the actual vehicle.

HEATED SEAT CUSHION (AT5 L / AT5 S)


1. The seat cushion is a clip-retained quick-release component. Hook a finger under the seat latch and lift upwards. Once the seat cushion releases, lift it up and remove it. If a wiring harness is connected beneath the seat cushion, disconnect the connector.

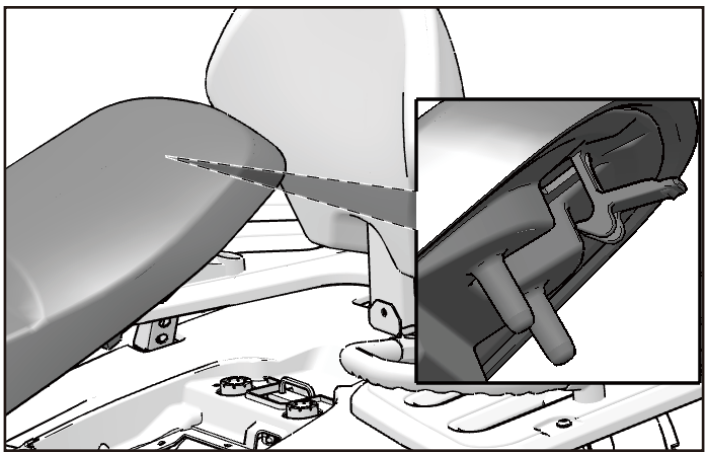


2. Remove the expanding clip assembly from the air cleaner cover, then remove the air cleaner cover.

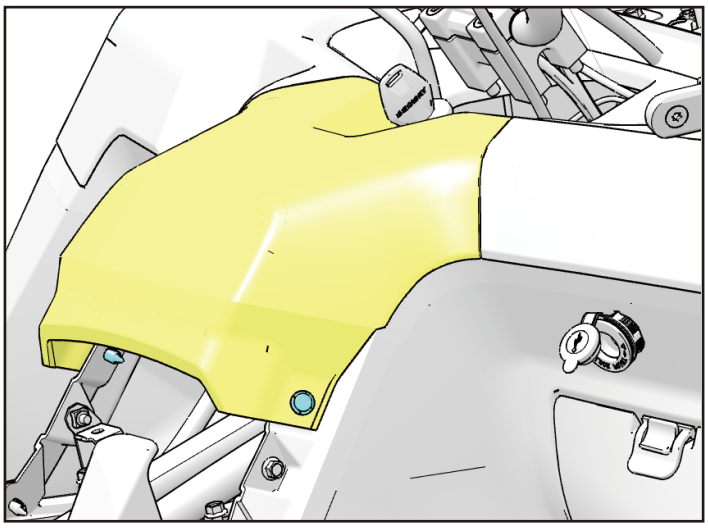


3. Remove all expanding screws and retaining screws from the right-hand front inner mudguard, then remove the front inner mudguard.

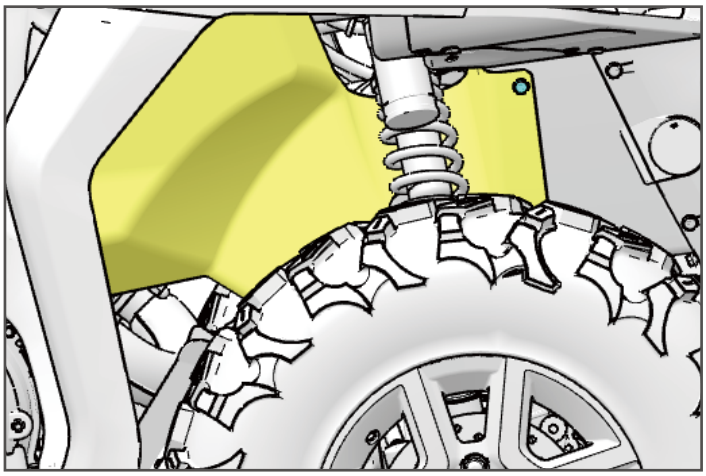


4. Disconnect the DC socket connector from the wiring harness. The DC socket power connector is located on the inner side of the right-hand front inner mudguard.

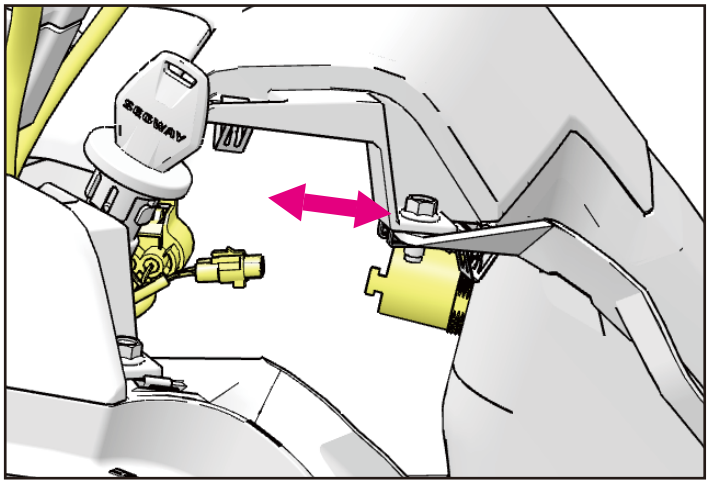


5. Connect the heated seat cushion adaptor harness to the DC connector as shown below.

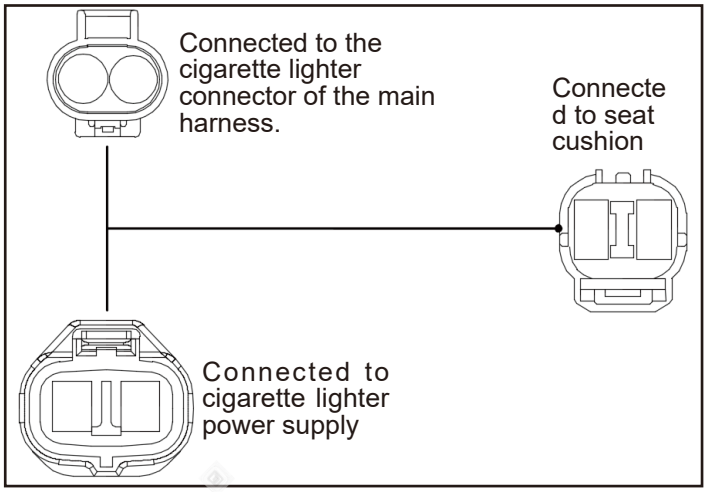

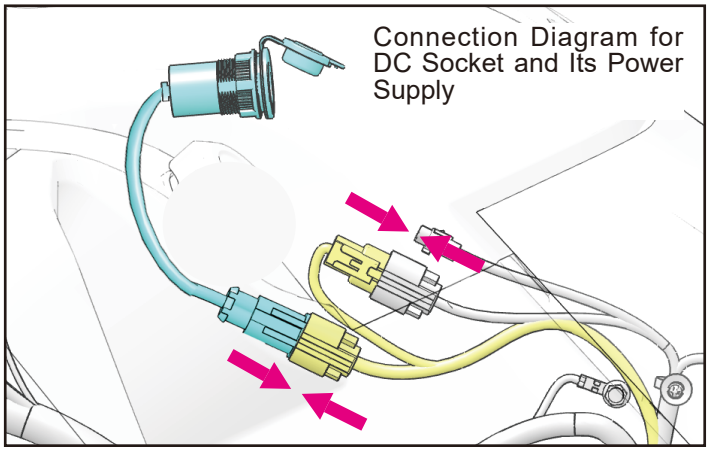


HEATED SEAT CUSHION (AT5 L / AT5 S)

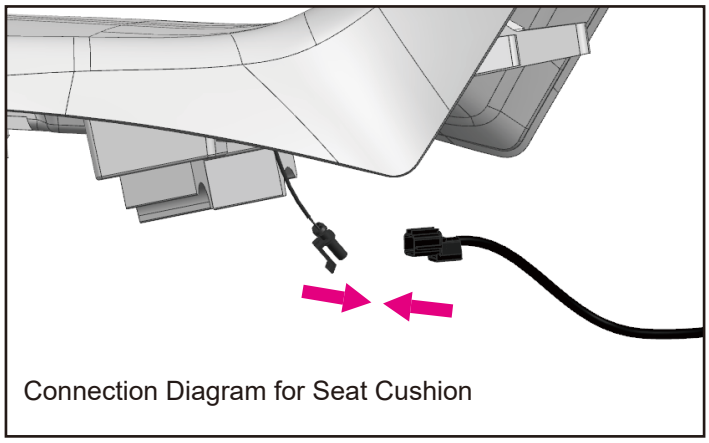


Connection Diagram for Seat Cushion

6.Route the adaptor harness as shown below and secure it with three cable ties.

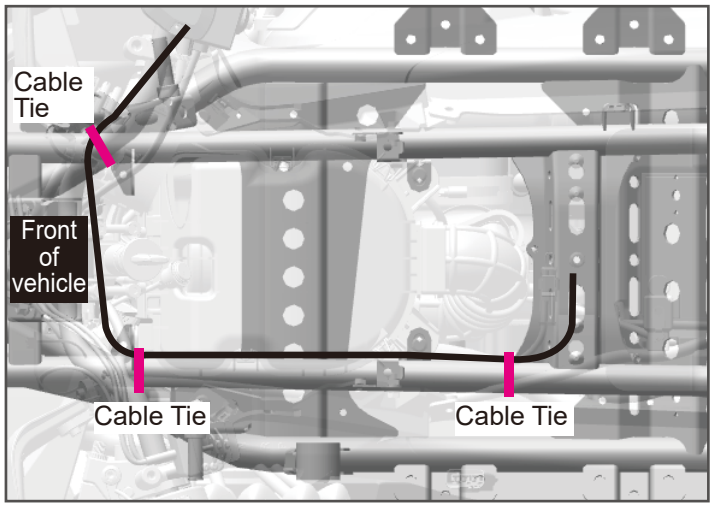

7. Install the right-hand front inner mudguard and the air cleaner cover.

8.Insert the front tab of the seat cushion into the U-shaped bracket welded to the frame. Push the seat firmly forwards and press it down to lock it in place.

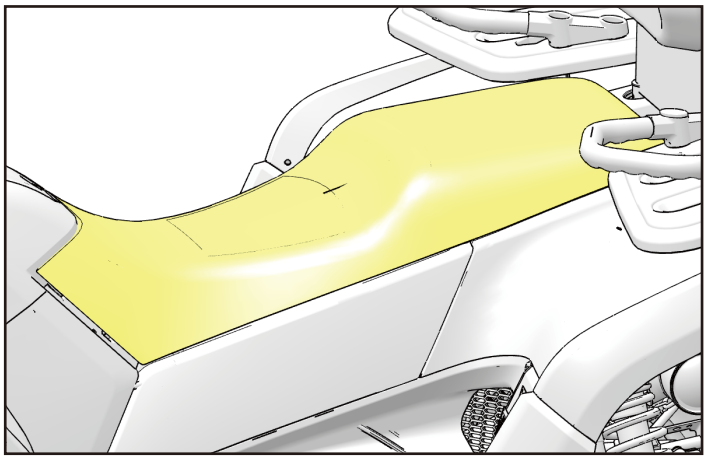

9. Start the vehicle and check the heated seat cushion operates correctly. The heated seat cushion switch is located on the left-hand side of the seat cushion. Press and hold the button for 2 seconds to switch on the heating. The red indicator illuminates by default. Press the button once to switch between the red and blue indicators. Press and hold the button for 2 seconds to switch off.

